

Live Session

Lessons Learned of CubeSat Missions

Department of Space Systems Engineering, Kyushu Institute of Technology

Department of Space, Semiconductor, and Mechatronics Engineering, Chiba Institute of Technology

Professor Ph.D. Mengu Cho

This lecture is NOT specifically about KiboCUBE and covers GENERAL engineering topics of space development and utilization for CubeSats.

The specific information and requirements for applying to KiboCUBE can be found at:

The specific information and requirements for applying to KiboCUBE can be found at: https://www.unoosa.org/oosa/en/ourwork/psa/hsti/kibocube.html








0. Lecturer introduction








































Position:

2004 - Professor, Department of Space Systems Engineering*
 Director, Laboratory of Lean Satellite Enterprises and In-Orbit Experiments **
 Kyushu Institute of Technology, Japan

(*since 2018) (**up to 2022) (***since 2025)

- 2024 Professor, Department of Space, Semiconductor, and Mechatronics Engineering***, Chiba Institute of Technology, Japan
- 2014 Visiting Professor, Nanyang Technological University, Singapore
- 2013 Coordinator, United Nations/Japan Long-term Fellowship Programme, Post-graduate study on Nano-Satellite Technologies (PNST)

Research Topics:

Lean Satellite, Spacecraft Environment Interaction



Contents


- 1. Introduction
- 2. Lessons Learned and Root Causes
- 3. Mission Assurance
- 4. Conclusion



1.1 University satellite projects in Japan

- UNISEC-Japan consists of
 - 36 Universities and research institutions
 - 49 organizations
 - 636 student members, and
 - 262 individual and 19 cooperate members, and
 - alumni members (based on Apr. 13, 2021).
- UNISEC-Japan members maintain cooperative relationships in conducting practical space development and utilization.

1.1 University satellite projects in Japan

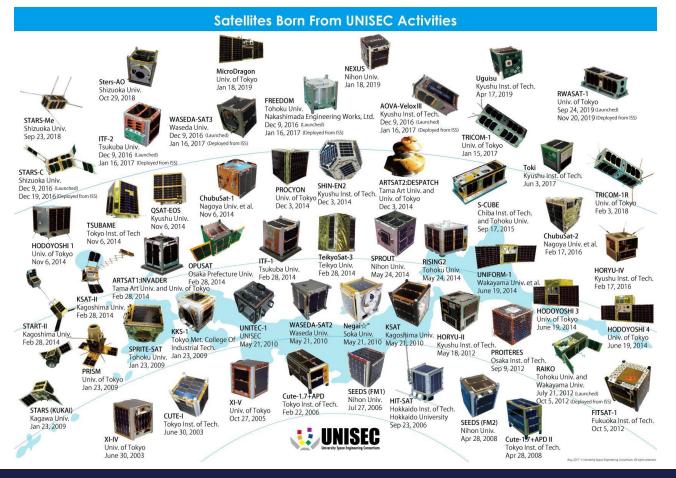

1.2 UNISEC's Lean Satellite Mission Assurance Activities


- In 2020, members of UNISEC-Japan utilized the time that became available due to the pandemic in
 - Remote sessions on lessons learned from university satellite projects in UNISEC (University Space Engineering Consortium) JAPAN in 2020
 - Survey on the lessons learned of mission assurance
 - Sponsored by JAXA
 - Report (439 pages!) on
 - Analysis about the success and failure cases of domestic micro and nano-satellite projects and their causes.
 - Extraction of requirements for mission assurance of micro and nano-satellites.

INISSON 920-114 JX-PSPC-530505 超小型衛星の成功率向上に向けたJAXA知見を 成果報告書 2021年3月26日 特定非営利活動法人大学宇宙工学コンソーシアム



1.2 UNISEC's Lean Satellite Mission Assurance Activities

- Following the activities in 2020, in 2021 UNISEC members worked on
 - Mission assurance handbook for universitybased lean satellites
 - Further analysis of the failure cause by Intensive interviews with the persons in charge of the projects.
 - Based on the activities, "Mission Assurance Handbook for the University-built Lean Satellite" was published in March 2022.
- This lecture will provide examples of lessons learned cases, the failure root causes and how to improve the mission success rate.

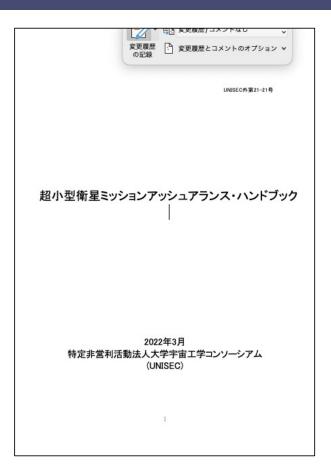





2.1 Case 1 (3U CubeSat)

- Satellite was very difficult to assemble. Every time when the satellite was assembled due to testing, it suppressed the schedule significantly
 - During the safety review, promised to do 3D measurement each time the satellite is assembled
- Software development progress was far behind the hardware development
- Due to collision of I2C, the satellite entered a mode of infinite loop of resetting


2. Root cause

2.1 Case 1 (3U CubeSat)

- Satellite was very difficult to assemble. Every time when the satellite was assembled due to testing, it suppressed the schedule significantly
 - During the safety review, promised to do 3D measurement each time the satellite is assembled
- Software development progress was far behind the hardware development
- Due to collision of I2C, the satellite entered a mode of infinite loop of resetting
- Promised more than enough for the safety requirement verification
- Only faculty members involved in the mission definition. Not enough student motivation
- Poor schedule management because it was the first satellite. Long-term end-to-end test was not done
- Satellite structure was too complicated (lack of experience in satellite design)

2.2 Case 2 (1U CubeSat)


- After deployment, no signal from the satellite was received by GS
- There were many single-point-of-failure in the satellite design
- A possibility of connecting solar cells in a wrong way
 - Mistake a bypass diode tab as an electrode
- The delivery date was fixed. The satellite had to be delivered regardless its condition

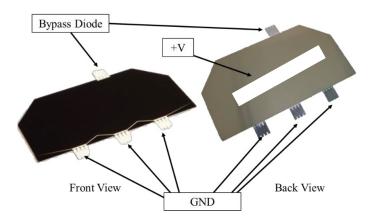



2.2 Case 2 (1U CubeSat)

- After deployment, no signal from the satellite was received by GS
- There were many single-point-of-failure in the satellite design
- A possibility of connecting solar cells in a wrong way
 - Mistake a bypass diode tab as an electrode
- The delivery date was fixed. The satellite had to be delivered regardless its condition
- It was the first satellite. Didn't know what to do to build a satellite.
- Didn't know where to ask even if there is a question

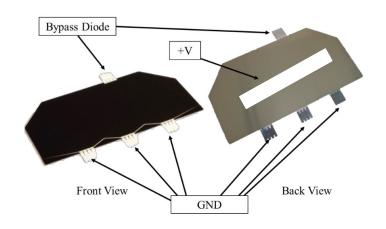



2 .3 Case 3 (2U CubeSat)

- Ground station preparation was insufficient. Checking its functionality was not done using other satellites in orbit
- The university team was from Mechanical Engineering Department, lacked know-how of communication. The team depended on external supporters regarding the communication system. It was difficult to point out problems by the system test done at the university.

2 .3 Case 3 (2U CubeSat)

- Ground station preparation was insufficient. Checking its functionality was not done using other satellites in orbit
- The university team was from Mechanical Engineering Department, lacked know-how of communication. The team depended on external supporters regarding the communication system. It was difficult to point out problems by the system test done at the university.
- Depended on the amateur radio experts outside the campus for the radio. But the communication between the expert and the students was difficult due to physical distance. The principal faculty couldn't take care of the gap properly.
- Lack of necessary expertise for the satellite project.

2 .4 Case 4 (50kg Earth Observation Satellite)

- Satellite power budget did not have enough margin. Because of power shortage frequent satellite reset occurred.
- Every time, the reset occurred, the attitude control history was over-written and the complex attitude control had to be restarted once again. It took too much time to establish the proper attitude for the mission (camera capture and high-speed downlink).
- Because of the insufficient attitude control, no image data could be downlinked

2 .4 Case 4 (50kg Earth Observation Satellite)


- Satellite power budget did not have enough margin. Because of power shortage frequent satellite reset occurred.
- Every time, the resent occurred, the attitude control history was over-written and the complex attitude control had to be restarted once again. It took too much time to establish the proper attitude for the mission (camera capture and high-speed downlink).
- Because of the insufficient attitude control, no image data could be downlinked
- It was the first satellite for the team. Lack of experience in satellite system design, development and operation.
- No time to do the full system test to check the power budget under the flight representative condition

KiboCUBE Academy

Couldn't do "Test as you fly"


2 .5 Case 5 (50kg Earth Observation Satellite)

- The battery was not designed to stop charging once it is fully charged. It forced very delicate charging maneuver in orbit.
- No bypath diode or blocking diode in solar cell circuit. A shadow on solar panel circuit killed entire solar array circuit on 50cmx50cm panel.
- When the voltage became low, the satellite computer became Zombie state where it cannot function nor be rebooted completely.

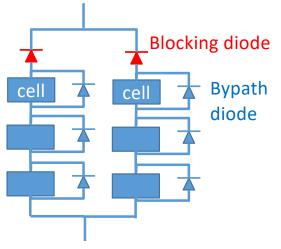

2 .5 Case 5 (50kg Earth Observation Satellite)

- The battery was not designed to stop charging once it is fully charged. It forced very delicate charging maneuver in orbit.
- No bypath diode or blocking diode in solar cell circuit. A shadow on solar panel circuit killed entire solar array circuit on 50cmx50cm panel.
- When the voltage became low, the satellite computer became Zombie state where it cannot function nor be rebooted completely.
 - It was the first satellite for the team. Lack of experience to check the design made by the EPS contractor.
 - Lack of experience of doing system test

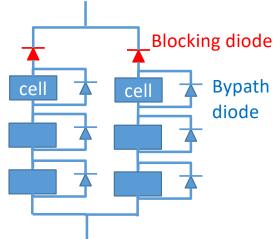



2 .6 Case 6 (7kg Education/Technology Demonstration Satellite)

- Satellite deployment was successful and housekeeping data was collected for initial 3
 weeks from the deployment before doing the mission. Communication with the satellite
 was suddenly lost due to single event latch-up (SEL)
- The satellite recovered due to power reset, but the operation time was limited due to a series of disruption caused by SEL.
- The over current protection (OCP) to exist from the latch-up didn't work due to inadequate setting of the threshold curren
 - Threshold value: 500mA
 - The actual latch-up current: 200mA.

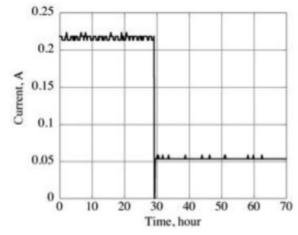


Fig. 4 Latch-up current acquired on orbit

2 .6 Case 6 (7kg Education/Technology Demonstration Satellite)

- Satellite deployment was successful and housekeeping data was collected for initial 3 weeks from the deployment before doing the mission. Communication with the satellite was suddenly lost due to single event latch-up (SEL)
- The satellite recovered due to power reset, but the operation time was limited due to a series of disruption caused by SEL.
- The over current protection (OCP) to exist from the latch-up didn't work due to inadequate setting of the threshold curren
 - Threshold value: 500mA
 - The actual latch-up current: 200mA.
 - Decided the OCP threshold value without any basis
 - SEL protection was designed but not verified
 - Should have done the main mission earlier


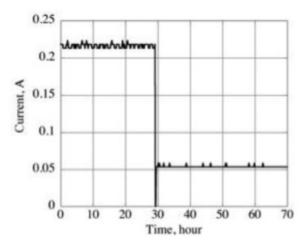


Fig. 4 Latch-up current acquired on orbit

2.7 Case 7 (Constellation of five 1U CubeSats)


- Experimental patch antenna for both UHF (downlink) and VHF (uplink) was used
- The gain of the patch antenna was not as good as expected. No uplink success for all the five satellites. CW beacon was very weak.
- The problem was not detected by the ground test because the flight model antenna arrived at the last minutes and no system communication test was not done with the flight models.



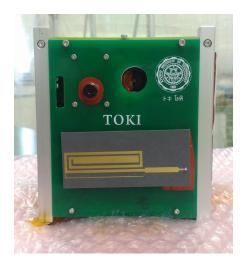

2.7 Case 7 (Constellation of five 1U CubeSats)


- Experimental patch antenna for both UHF (downlink) and VHF (uplink) was used
- The gain of the patch antenna was not as good as expected. No uplink success for all the five satellites. CW beacon was very weak.
- The problem was not detected by the ground test because the flight model antenna arrived at the last minutes and no system communication test was not done with the flight models.
- Satellite design (demonstration of new technology) was inconsistent with the satellite mission (education)
- Lack of expertise in communication. Couldn't understand the risk of patch antenna
- Should have considered the advantage of constellation more. Should have selected a strategy of making at least one satellite survives than making all the satellites survive
- Key decision (use of patch antenna) was made only by the principal faculty. No other member could challenge the decision.

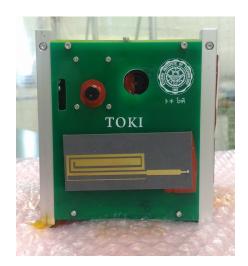




2 .8 Case 8 (Constellation of three 1U CubeSats)

- UHF beacon downlink signal was improved drastically
- The uplink suffered difficulty due to internal noise generated by EPS board.
- The problem was not detected during the ground test because an internal attenuator of 10dB in the reference diploe antenna was overlooked, resulting in overestimation of 10dB in the link budget.

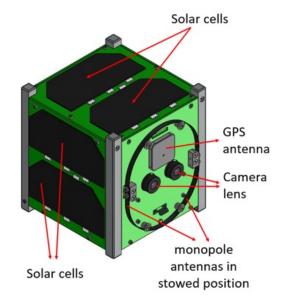

2 .8 Case 8 (Constellation of three 1U CubeSats)

- UHF beacon downlink signal was improved drastically
- The uplink suffered difficulty due to internal noise generated by EPS board.
- The problem was not detected during the ground test because an internal attenuator of 10dB in the reference diploe antenna was overlooked, resulting in over-estimation of 10dB in the link budget.
- Few expertise in communication. Couldn't check the test setup consistency.
- Lack of knowledge that the internal noise affects the uplink signal reception.
 - The background noise in the link budget was chosen without any basis

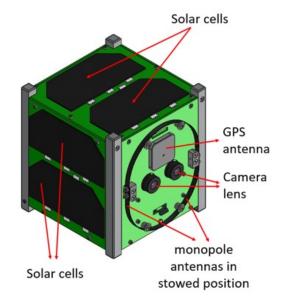



3.1 Common root cause

- In the examples shown, there are many common causes among different cases
 - Poor schedule management
 - Insufficient team talent and skill
 - Inconsistency in requirements
 - Improper verification planning
 - Wrong strategy to avoid total satellite loss
 - Insufficient full system end-to-end test
 - Difficulty in assembly, integration and testing
 - Poor understanding of the rationale behind the design
 - Others

3 .2 What is mission assurance?

- Mission assurance
 - A series of activities to identify the factors in design, making, operation of the satellite, etc. that will hinder mission success and to eliminate or decrease the effects of such factors.
- University satellite is categorized as "Lean Satellite"
 - a satellite that utilizes non-traditional, risk-taking development and management approaches – with the aim to provide the satellite value to the customer and/or the stakeholder at low-cost and with short time to realize the satellite mission[1].
- Lean satellite tolerates a risk, but still needs to achieve the mission success as much as possible
 - "Failure is not an option" nor "Failure is accepted"
- [1] "Definition and Requirements of Small Satellites Seeking Low-Cost and Fast-Delivery", Edited by Mengu Cho and Filippo Graziani, International Academy of Astronautics, 2017, Code ISBN/EAN IAA: 978-2-917761-59-5

KiboCUBE Academy

3.3 Mission Assurance Handbook for the University-built Lean Satellite

- Target satellite projects at universities and polytechnic-colleges in Japan
 - Not only the first project of the universities, but also the second and later projects
- Summary of points to be kept in mind of faculty members and students to improve the mission success rate
- Organized in the order of project life-cycle
- Published and available online
- Much of the content is still applicable to satellite projects in new space companies and/or non-Japanese organizations

KiboCUBE Academy

- Currently ver.4
 - Freely available

3.3 Mission Assurance Handbook for the University-built Lean Satellite

Use your smartphone and capture the QR code below



https://ma.unisec.jp/wp-content/uploads/2025/03/ma_handbook_ver4.0_en.pdf

3.3 Mission Assurance Handbook for the University-built Lean Satellite

Contents

- 1. Introduction
- 2. Project management
- 3. Mission definition
- 4. Conceptual design
- 5. Detail design
- 6. Production
- 7. Testing
- 8. Operation
- 9. Post-operation
- 10. Sustainability of university satellite program

Ordering according to project life-cycle



If you missed the previous page,





3 .4 Project management (schedule management)

- First project often fails. Improper schedule management due to lack of satellite project experience
- Very little time spent in system tests
- Guideline for the project milestones until satellite delivery

Time	Milestone
D	Satellite delivery
D-1 month	FM hardware and software complete. Finished hardware testing. Basic GS software is complete
D-3 month	All FM hardware components delivered and ready for FM system assembly
D-6 month	Finished EM testing and confirmed that the satellite functions as a system
D-10 month	All EM hardware components delivered and ready for EM system assembly
D-13 month	Finished proof of concepts. Confirmed that the missions are feasible. Finished EM design and start procurement
D-A* month	Determined what missions to be done

A* depends on each satellite project

3 .5 Project management (team talents)

- Not possible to have all the talents necessary for the projects by students alone. Need to find solutions to fill the shortage,
 - 1. Procurement
 - 2. Collaboration with external people
 - 3. Expect students to grow
- Even for 1 or 2, the requirements for the procured or outsourced items must be made by the team
- Keep persons familiar with the satellite design for operation
 - Need to finish the project life cycle (from kick-off to operation) in 3 years
- The principal investigator (faculty member)
 - Responsible for keeping the student motivation
 - Responsible for securing the communication channels for the external assistance

KiboCUBE Academy

3.6 Project management (Safety requirement verification)

- Non-compliance with the safety requirement may lead to serious delay of the schedule
- In the worst case, the satellite is not launched
 - Dummy mass will go instead of your satellite
- At the end of conceptual design and detailed design, list-up the issues related to safety requirements and confirm with the launch provider
- Agree with the launch provider on the safety requirement verification methods that can be done with the minimum effort
 - The safety verification is necessary, but non-value adding activity
 - Do more value-adding activities such as mission assurance






3.7 Mission definition phase (feasibility)

- Know the limits when you define the missions
 - Team talents and skills
 - Budget
- A professor is not a God
 - Doesn't know everything to judge the mission feasibility
 - Open mind to suggestion/comments/assistance by others
- 3-axis stabilization from the first satellite?
- High-speed communication by mechanical students?

3.8 Conceptual design phase (requirement management)

- Check consistency between the mission requirements and the design requirements
 - Design should satisfy the mission requirements
 - No design requirement that doesn't fit to the mission requirements
- External review by experienced experts is effective
- Open-mind to external suggestions

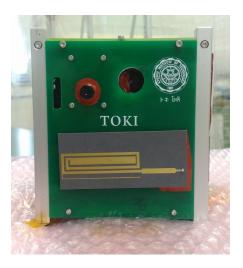

3.9 Conceptual design phase (Verification plan)

- No use of a design that cannot be verified
- Doable verification plan

List of minimum test items for an ISS-released CubeSat

Test Item	EM(QT)	FM (AT)
Electromagnetic Compatibility	R	N*1
End-to-End mission simulation	R	N*1
Electrical interface	R	R
System function	R	R
End-to-End long-time operation	N	R
Deployment	R	R
Fit Check	R	R
Thermal	R	O _{*3}
Random Vibration	O*2	R

^{*1} Included in End-to-End long-time operation test



^{*2} Depends on needs of each satellite

^{*3} The exposure to high/low temperature may be required for safety requirements verification

3.10 Detailed design phase (Risk Management, FTA, FMEA)

- Try to minimize the risks based on priority
- External review is effective to list up the risks with high priority along with the safety issues
- FTA/FMEA are not taught in school
 - Start from the levels students/professors can understand
 - List up single-point-of-failure and **prioritize** the risks
 - Not only part/components, but also works (wrong command, wrong assembly, etc.)

KiboCUBE Academy

3 .11 Testing phase (Electromagnetic Compatibility Test)

- Because of cold launch, EMC with launchers and other satellites are not important
- Live with self-generated noise
- Verify that the communication link has enough margin
 - Uplink signal level is much higher than the satellite-generated noise floor
 - Confirm before moving to FM




Sensitivity test for uplink success in a shield box



3.12 Testing phase (End-to-End mission test)

- Verify the basic data flow of the main mission
 - Command uplink
 - Satellite mission
 - Data downlink
 - Confirmation of data on GS PC
- Make the details, after confirming that the basic mission can be done

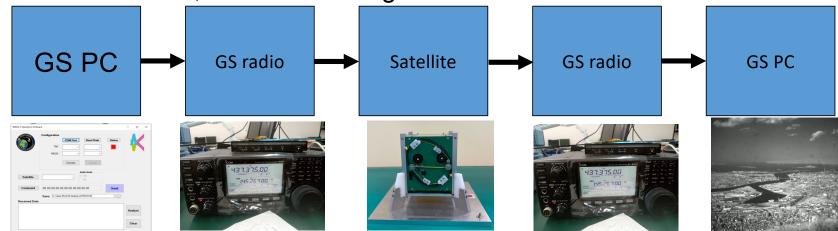

KiboCUBE Academy

3 .13 Testing phase (system function test)

- Move to FM assembly as soon as FM components are delivered and start the function tests as an integrated system
- Check the consistency of data sent from the satellite
- Do not move to the environment tests (e.g. vibration, thermal vacuum), before you solve problems

• Expect many problems found. Have enough schedule margin before moving to

the environment tests




FM system function test



3 .14 Testing phase (End-to-End Long-term operation)

- Finding and fixing bugs of flight software
- Operation rehearsal
 - Critical modes (release, recovery from reset, etc.)
 - Nominal modes (HK data collection)
 - Mission modes
- Link budget confirmation
 - Compatibility with ground station


Line loss and noise level inside the satellite is hard to derive theoretically. Confirm the link budget by testing

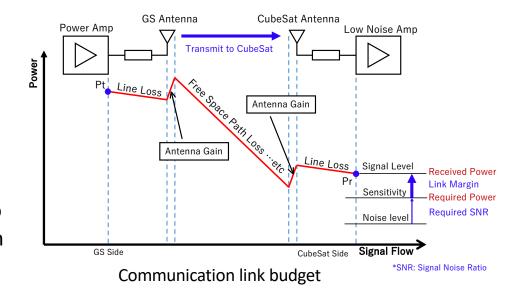



3 .15 Testing phase (Deployment test)

- 25% of university satellites end up DoA (Dead on Arrival)
 - Antenna deployment failure?
- Make sure the antenna can be deployed in the worst case
 - Cold, low-battery, etc.

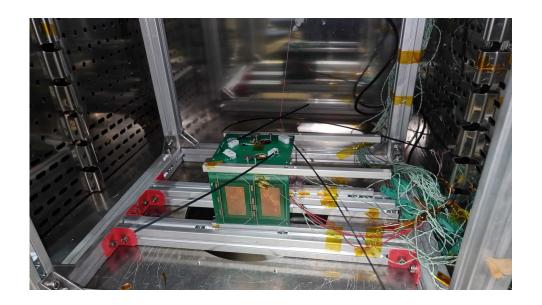

Antenna deployment test in low temperature

3 .16 Testing phase (Fit check)

- CubeSats may not fit into a POD at satellite delivery
- The best and simplest way is to do fit-check with an official POD borrowed from the launch provider
 - Both for EM and FM



Fit-chek

3 .17 Operation phase

- Ground station preparation and maintenance
- Operation plan
 - Obtain the frequency license asap
 - In Japan, we get only "preliminary license" before launch. Need full license to operate the satellite officially and publish the results

KiboCUBE Academy

- Do the main mission first. Achieve the minimum success criteria as soon as possible
- Anomaly investigation
 - Never give up
 - P/I (faculty) should keep the motivation of the team
 - Do thorough FTAs for the next project



4. Conclusion

- CubeSat mission success rate is low
 - Especially for the first satellite
- We can take the risk in CubeSat, but this does not mean "the failure is accepted"
- There are many lessons learned
- Sharing the lessons and the root causes among the community is important
- Mission assurance handbook has been published
 - Ver.4 is currently available

