



Technical University
of Moldova

University of
Applied Science



Development of geodetic databases for MOLDPOS services

Vasile Chiriac
Livia Nistor-Lopatenco
Andrei Iacovlev
Vasile Grama

Reiner Jaeger
Peter Spohn
Ghadi Younis
Simone Kälber



United Nations International Meeting on the Applications of GNSS, Vienna, 12 - 16 December 2011



Subjects



- **Introduction**

Preconditions for new geodetic infrastructure development. Development of GNSS Permanent Network and MODPOS services

- **Geodetic databases development**

RTCM-based Positioning GNSS-Services. MODPOS architecture and communication configuration. Reference Datum Transformation. Height Reference Transformation. Testing out of geodetic databases

- **Generation of RTCM 3.1 Transformation messages**

Gridding for transformation messages. Structure of RTCM 3.1 messages

- **GNSS-Positioning Services Applications**

GNSS-Positioning Services – User-Groups. GNSS-based and Multisensor Low-Cost Platforms for Navigation and Object-Georeferencing. Growth of GNSS-Positioning Services User-Groups

- **Conclusions**



Introduction




Preconditions for new geodetic infrastructure development


- Development of new Moldavian Reference System MOLDREF99 and Transversal Mercator for Moldova (TMM) Map Projection (1999)
- Creation of the National Geodetic Network (1999-2002) and National Gravity Network (2006-)
- Reconstruction of National Leveling Network and future integration in ULEN (2002-)
- Installation of first permanent GNSS reference station at Technical University of Moldova in the frame of educational project JEP-24243-2003, TACIS-TEMPUS (2006)
- Installation and maintenance of IGEO (Chisinau) EPN permanent GNSS reference station by the Agency of Land Relations and Cadastre in collaboration with BKG (2007)

Preconditions for new geodetic infrastructure development


**Development of GNSS Permanent Network and MOLDPOS service
(Government decision Nr. 307 from 28.04.2011)**

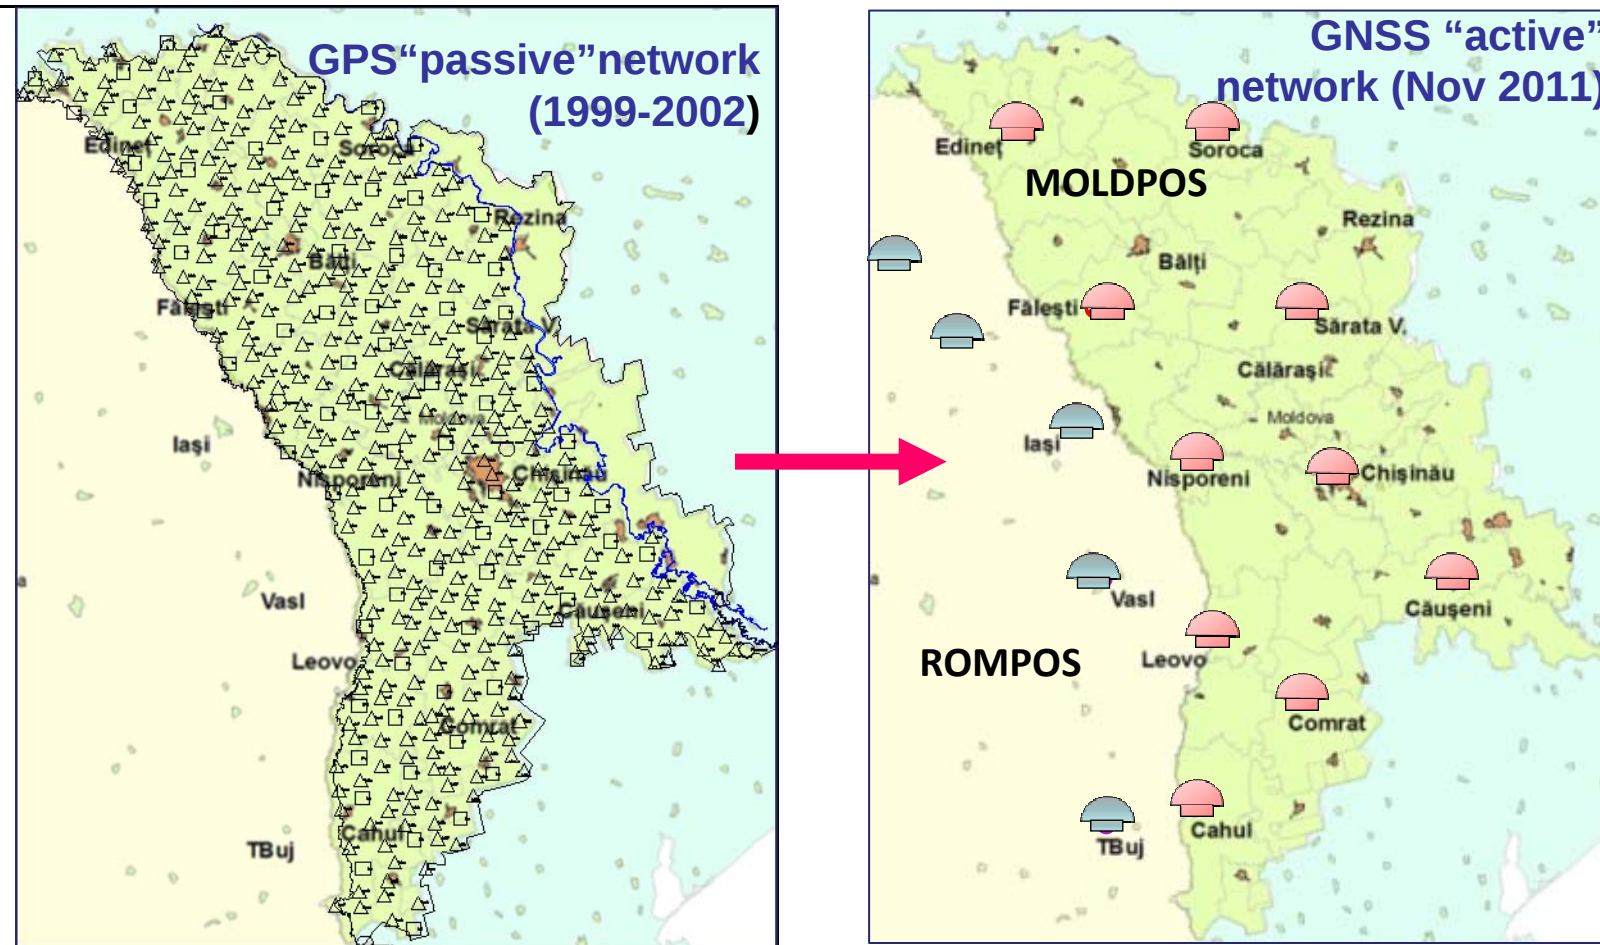

United Nations International Meeting on the Applications of GNSS, Vienna, 12 - 16 December 2011

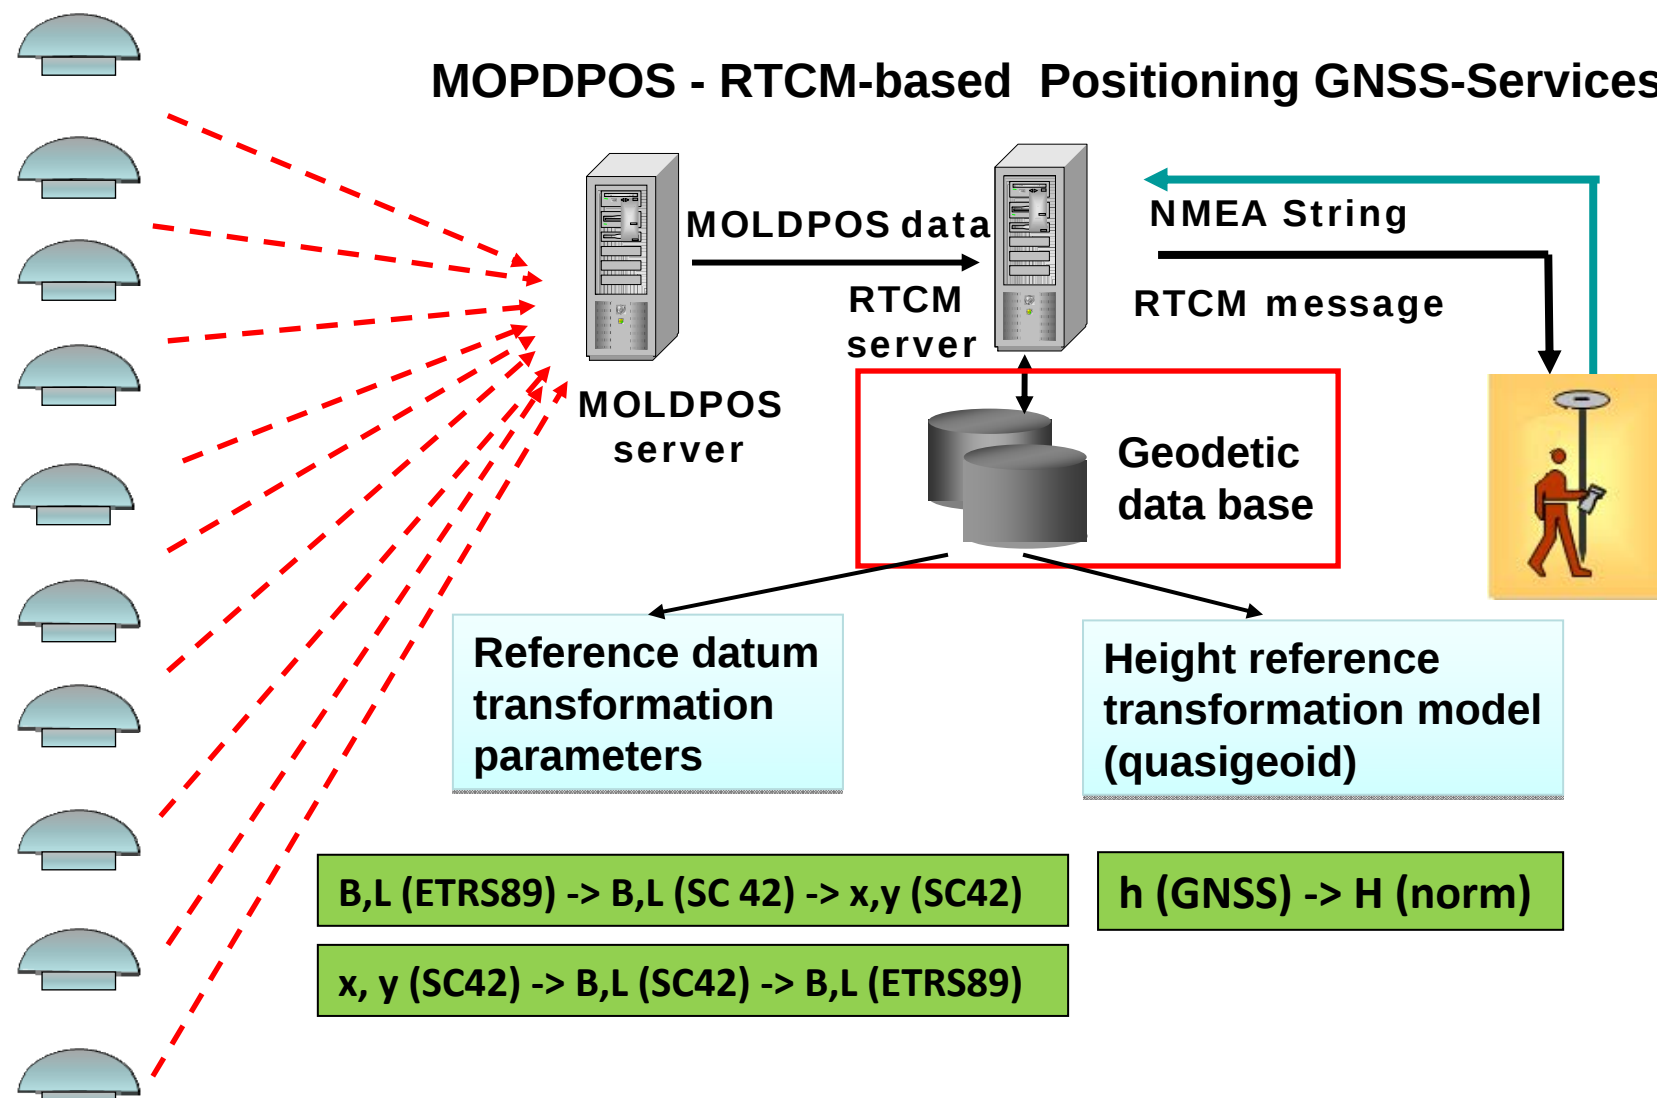

Reference Datum Transformation

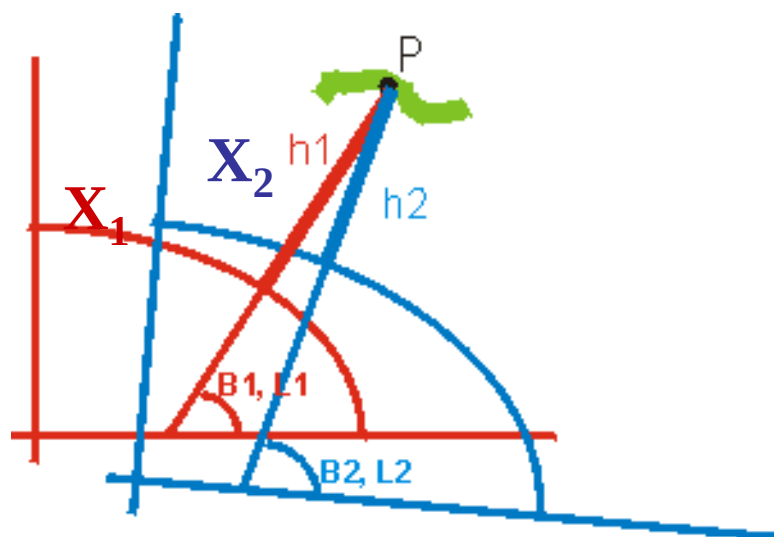

$$X = (N + h) \cdot \cos B \cdot \cos L$$

$$Y = (N + h) \cdot \sin B \cdot \sin L$$

$$Z = (N - Ne^2 + h) \cdot \sin B$$

3D Transformation

$$\begin{bmatrix} X_2(B_2, L_2, h_2) \\ Y_2(B_2, L_2, h_2) \\ Z_2(B_2, L_2, h_2) \end{bmatrix} = s \cdot R \cdot \begin{bmatrix} X_1(B_1, L_1, h_1) \\ Y_1(B_1, L_1, h_1) \\ Z_1(B_1, L_1, h_1) \end{bmatrix} + t$$


Reference Datum Transformation

Karlsruhe Solution

$$\left(\begin{bmatrix} B \\ L \\ h \end{bmatrix}_2 - \begin{bmatrix} \Delta B_{(a,b)_1,(a,b)_2} \\ \Delta L_{(a,b)_1,(a,b)_2} \\ \Delta h_{(a,b)_1,(a,b)_2} \end{bmatrix} - \begin{bmatrix} B \\ L \\ h \end{bmatrix}_1 \right)_i + \begin{bmatrix} v_B \\ v_L \\ v_h \end{bmatrix}_i = [Molodensky]_{(B,L,h)_1,i} \cdot \begin{bmatrix} \varepsilon_x \\ \varepsilon_y \\ \varepsilon_z \\ \Delta s \\ t_x \\ t_y \\ t_z \end{bmatrix}$$

were ellipsoid transition corrections are:

$$\begin{bmatrix} \Delta B_{(a,b)_1,(a,b)_2} = B(a,b)_2 | (X,Y,Z)_1 - B(a,b)_1 | (X,Y,Z)_1 \\ \Delta L_{(a,b)_1,(a,b)_2} = 0 \\ \Delta h_{(a,b)_1,(a,b)_2} = h(a,b)_2 | (X,Y,Z)_1 - h(a,b)_1 | (X,Y,Z)_1 \end{bmatrix}$$



Wtrans.Ink

1D-,2D-,3D-

Identical Points

WTRANS

www.geozilla.de

$-\sin(L) \cdot \frac{a \cdot W + h}{M + h}$	$\cos(L) \cdot \frac{a \cdot W + h}{M + h}$	0	$\frac{-\sin(B) \cdot \cos(B) \cdot N \cdot e^2}{M + h}$	$\frac{-\sin(B) \cdot \cos(L)}{M + h}$	$\frac{-\sin(B) \cdot \sin(L)}{M + h}$	$\frac{\cos(B)}{M + h}$
$\frac{\sin(B) \cdot \cos(L) \cdot (N \cdot (1 - e^2) + h)}{(N + h) \cdot \cos(B)}$	$\frac{\sin(B) \cdot \sin(L) \cdot (N \cdot (1 - e^2) + h)}{(N + h) \cdot \cos(B)}$	-1	0	$\frac{-\sin(L)}{(N + h) \cdot \cos(B)}$	$\frac{\cos(L)}{(N + h) \cdot \cos(B)}$	0
$-N \cdot e^2 \cdot \sin(B) \cdot \cos(B) \cdot \sin(L)$	$N \cdot e^2 \cdot \sin(B) \cdot \cos(B) \cdot \cos(L)$	0	$h + a \cdot W$	$\cos(B) \cdot \cos(L)$	$\cos(B) \cdot \sin(L)$	$\sin(B)$



Copag.Ink



Reference Datum Transformation

COPAG =
Continuously
Patched
Georeferencing
 Continuity along the
 Mesh Borders!




Combined Old Classical Triangulation and ETRS89
 Control Points from GNSS measurements



**Meshes = “Patching”
 for ETRS89 and
 Classical Datum-
 systems of Moldova**

**1 – 4cm accuracy
 transformation parameter
 Databases for Classical
 and ETRS89 Datum-
 systems**

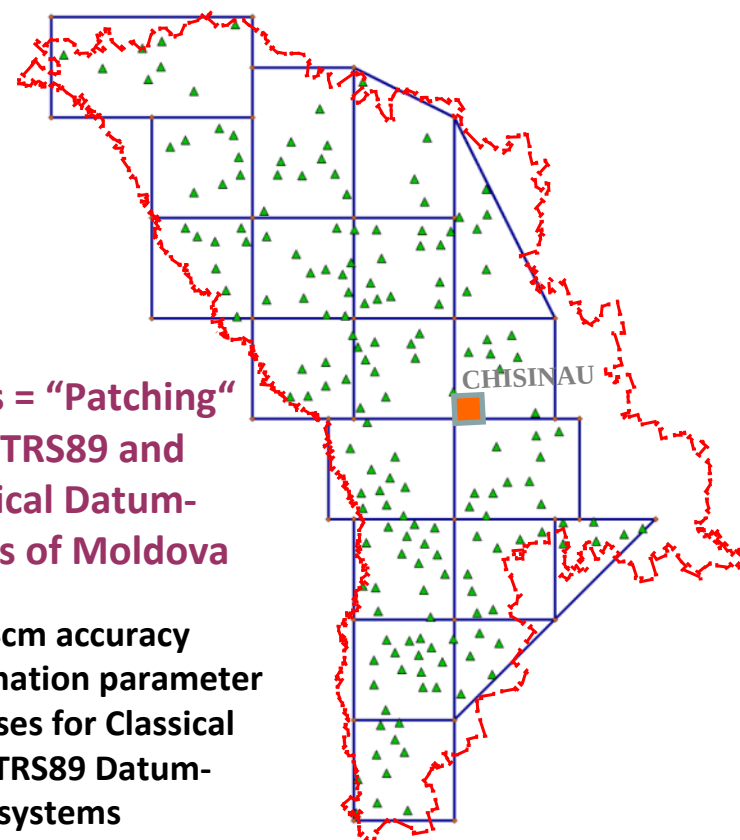


Height Reference Transformation

Reference-Transformation

Source

Target

$(B, L, h)_{\text{GNSS}} \Rightarrow N \text{ or } \zeta$

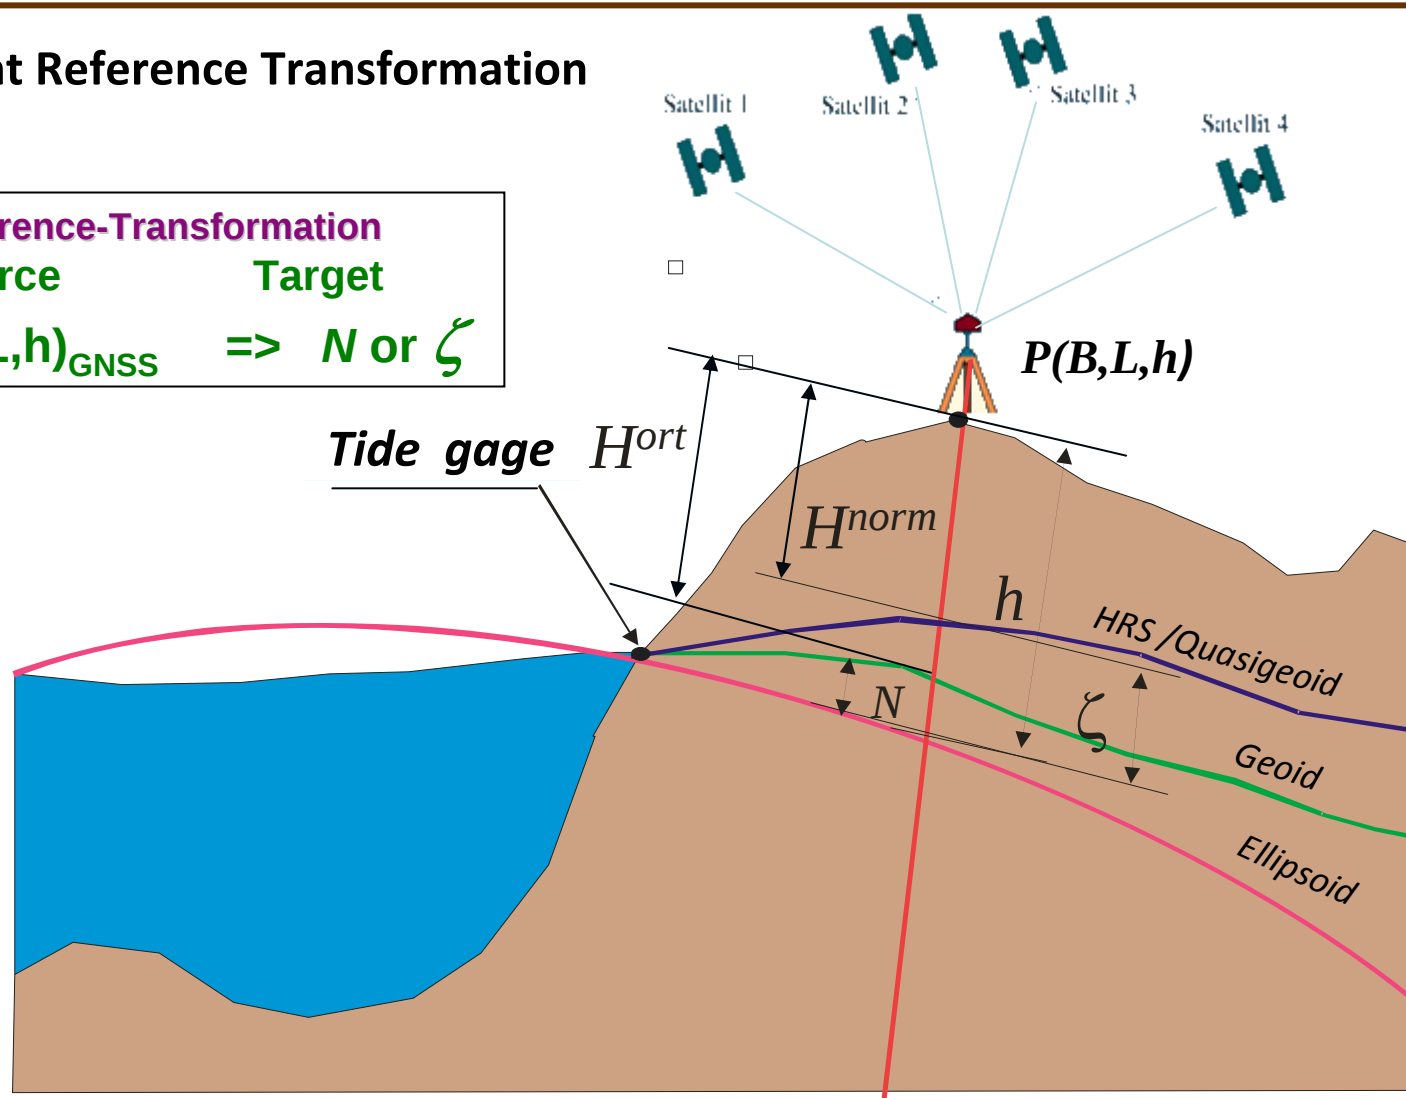

Height Reference Transformation

GNSS-heights and levelling heights

$$h_{\text{GNSS}} + v = H + \mathbf{f}^T \cdot \mathbf{p} - h_{\text{GNSS}} \Delta m$$

Existing Geoid Grids or Grids from GPM

$$\mathbf{N}_G^j + v^j = \mathbf{f}^T \cdot \mathbf{p} + \partial N_G(\mathbf{d}^j)$$

Vertical Deflection components

$$\xi^j + v = -\mathbf{f}_B^T / M(B) \cdot \mathbf{p} + \partial \xi(\mathbf{d}_{\xi,\eta})^j$$

$$\eta^j + v = -\mathbf{f}_L^T / (N(B) \cdot \cos(B)) \cdot \mathbf{p} + \partial \eta(\mathbf{d}_{\xi,\eta})^j$$

Continuity Equations along the mesh borders


$$C + v = C(\mathbf{p})$$

Observation Equations for the mapping of the coefficients of Global Geopotential Models (e.g. EGM2008, EIGEN)

$$g_{\text{grav}} + v = \sum_{k=0}^{\infty} \left(\frac{a}{r} \right)^{n(k)+1} \frac{(n(k)+1)}{r} \sum_{m=0}^k (\bar{C}'_{n(k),m} \cdot \cos m\lambda' + \bar{S}'_{n(k),m} \cdot \sin m\lambda') \cdot P_{n(k),m}(\cos \theta') + dg(\mathbf{d})$$

$$N_{\text{GPM}}^j + v = \frac{1}{\gamma_Q} \left(\sum_{k=0}^{\infty} \left(\frac{a}{r} \right)^{n(k)+1} \sum_{m=0}^k (\bar{C}'_{n(k),m} \cdot \cos m\lambda' + \bar{S}'_{n(k),m} \cdot \sin m\lambda') \cdot P_{n(k),m}(\cos \theta') - V_{\text{ref}} \right) + \partial N(\mathbf{d}^j)$$

Karlsruhe Solution for Digital Finite Element
Height reference surface representation as
polynomial

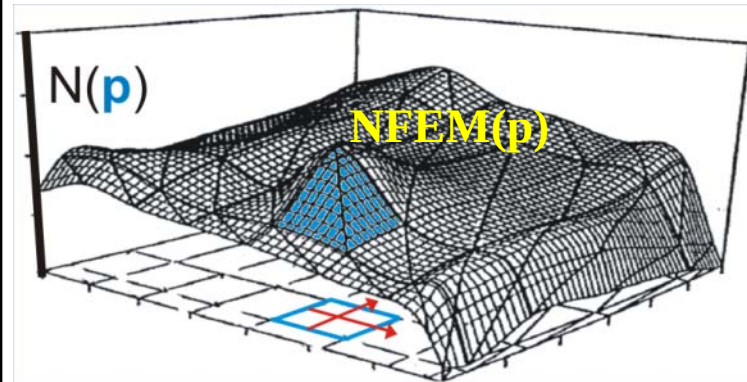



$$\text{NFEM}(\hat{\mathbf{p}} | B, L) = \mathbf{f}^T \cdot \hat{\mathbf{p}}$$

$$\mathbf{f}(B, L) = [1 | B, L | B^2, B \cdot L, L^2 | \dots]^T$$


$$\hat{\mathbf{p}} = [\hat{p}_{00} | \hat{p}_{10}, \hat{p}_{01} | \hat{p}_{20}, \hat{p}_{11}, \hat{p}_{02} | \dots]^T$$

Testing out of geodetic databases


Modeling HRS/Quasigeoid for Moldova using EIGEN-GL04C
EGG97 and GNSS/leveling measurements

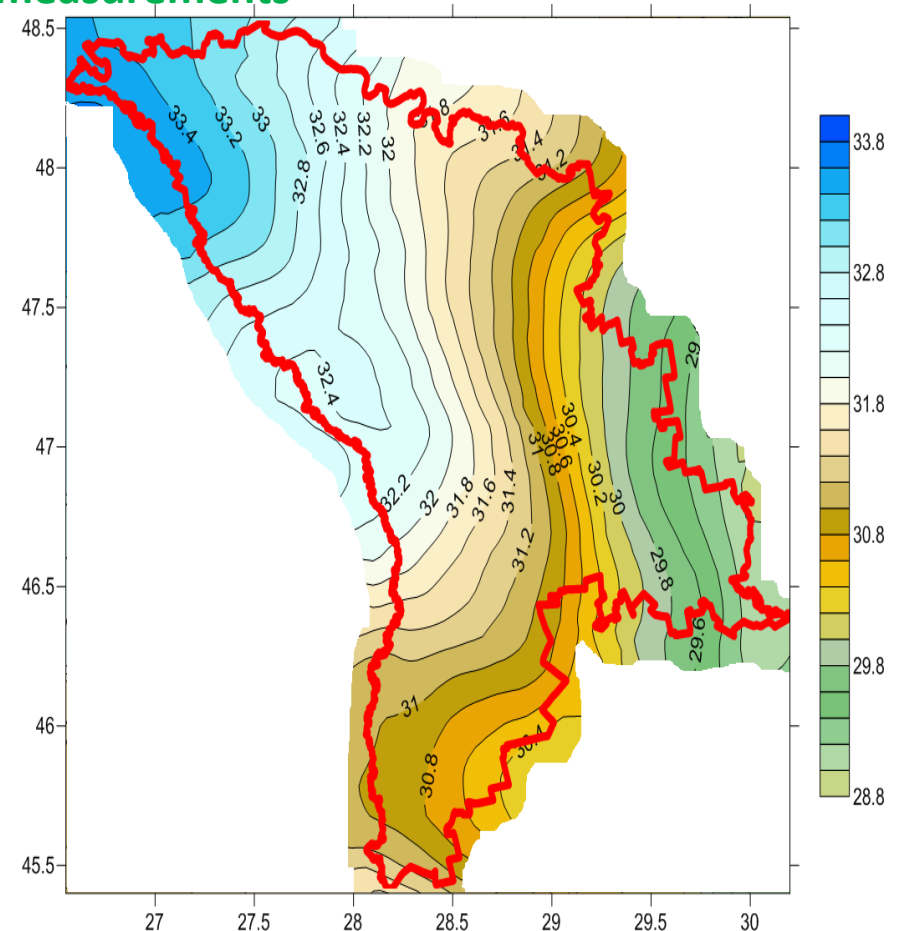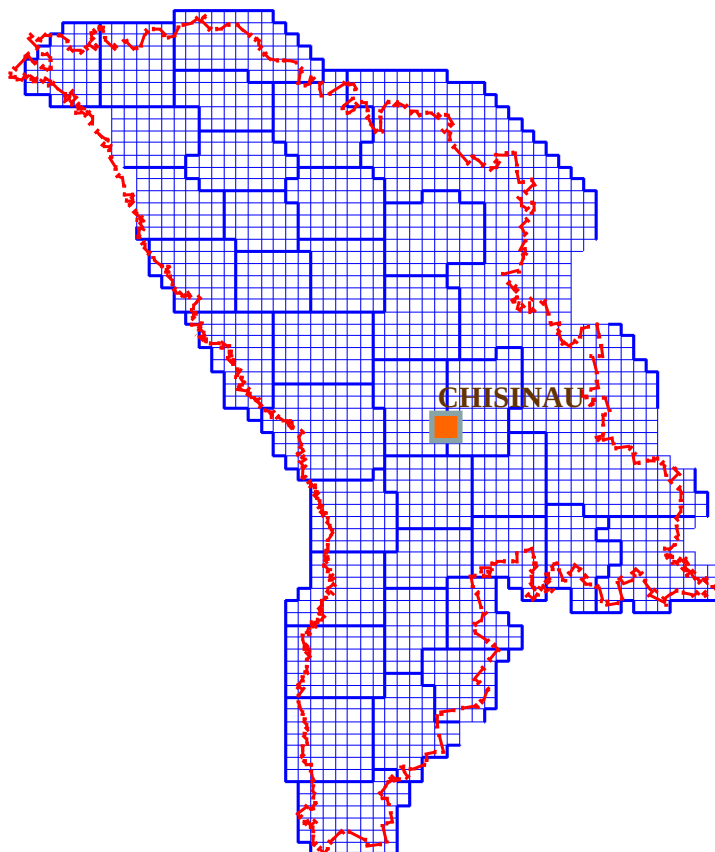

Testing out of geodetic databases

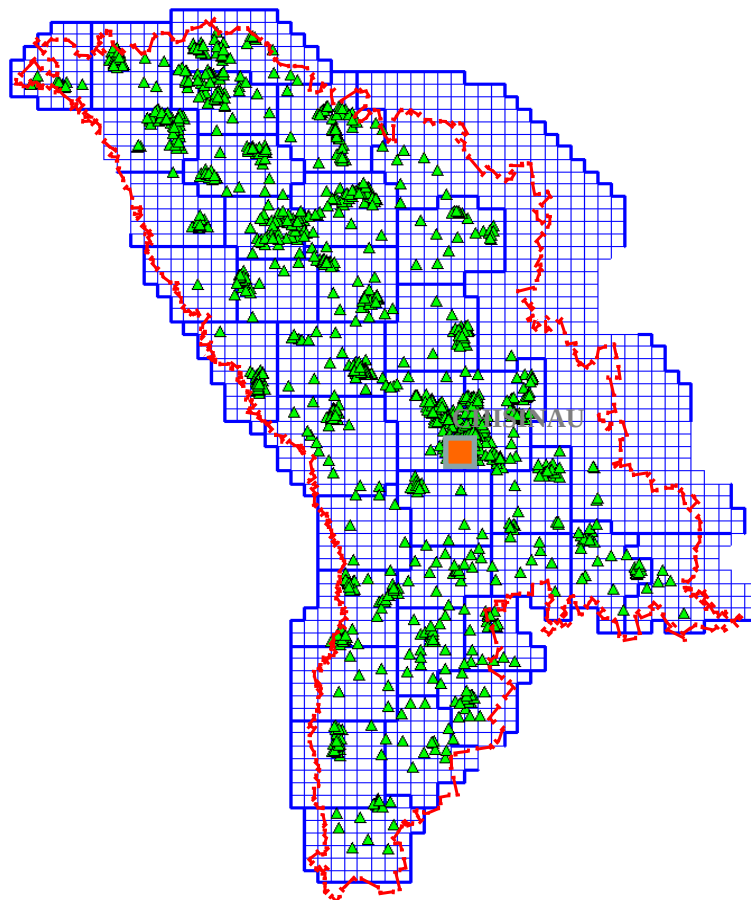

Accuracy of HRS/Quasigeoid for Moldova

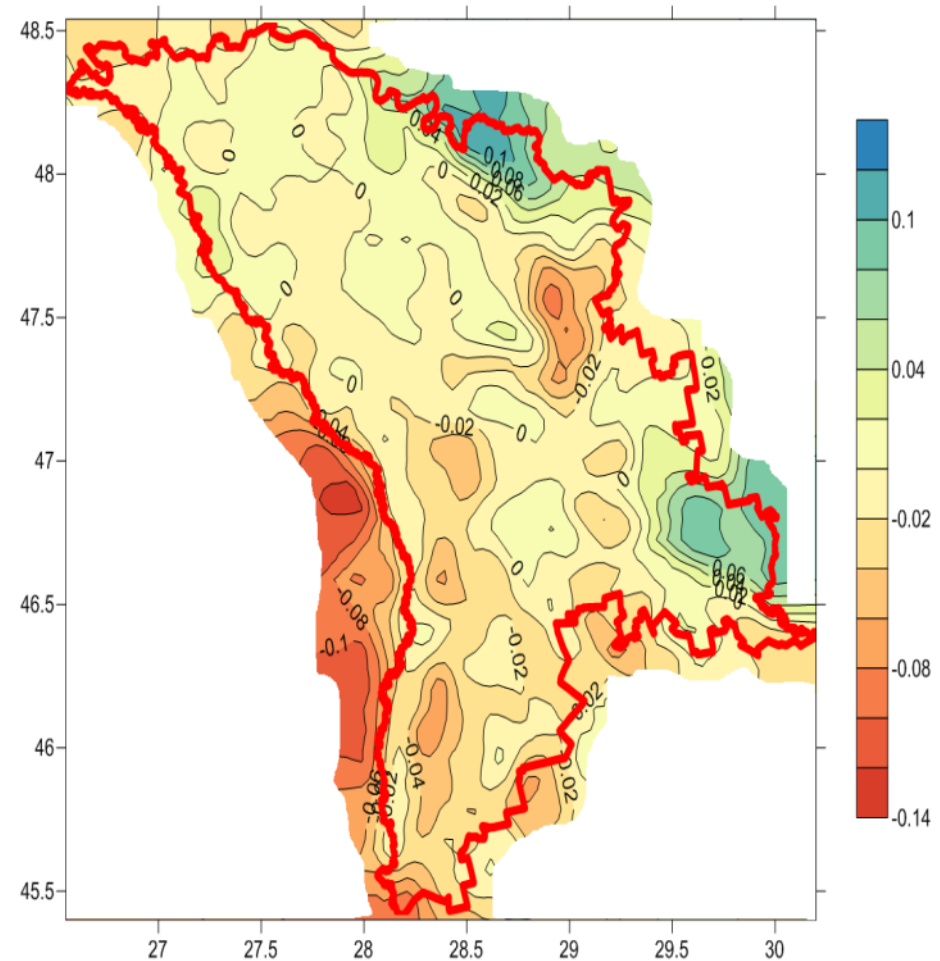

Testing out of geodetic databases




Second order leveling Benchmarks	MOLDREF99 Horizontal coordinates (m)		Leveling normal heights (m)	Calculated from GNSS measurements normal heights (m)	Heights difference (m)
	X (N)	Y (E)			
Ratus	225920,222	230467.989	58,414	58,407	-0,007
Roman	232181,483	227567,418	128,279	128,256	-0,023
Ivancea 181010	239335,129	2306740,827	162,697	162,669	-0,028
Fed 160-1	263140,000	217246,770	73,082	73,094	0,012




Gridding for Transformation Message

Source CRS - Grid

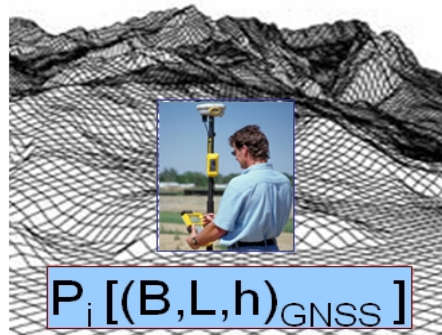

Generated Grid of Local Virtual Fitting Points P_i

Target CRS - Grid

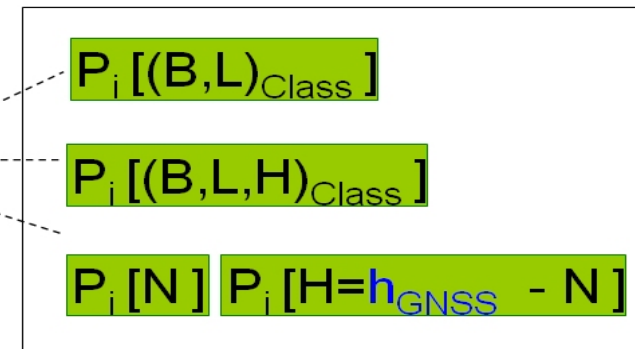

Resulting Local Virtual Fitting Points P_i

Any kind of individual


Reference Transformation

Gridding into 1.] and/or 2.]

1.] 7 Parameter Transformation

2.] Geoid/HRS Grid


$$\begin{bmatrix} x_T \\ y_T \\ z_T \end{bmatrix}_{Target,i} + \begin{bmatrix} r_x \\ r_y \\ r_z \end{bmatrix}_i = s \cdot \mathbf{R} \cdot \begin{bmatrix} x \\ y \\ z \end{bmatrix}_{Source/GNSS,i} + \begin{bmatrix} t_x \\ t_y \\ t_z \end{bmatrix}$$

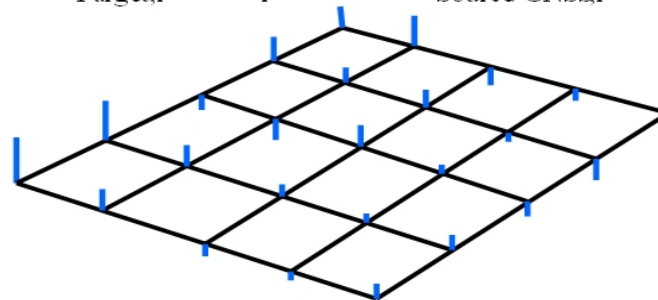

7 Parameter Trend and 3D „Small“ Residual Grid



Gridding for Transformation Message

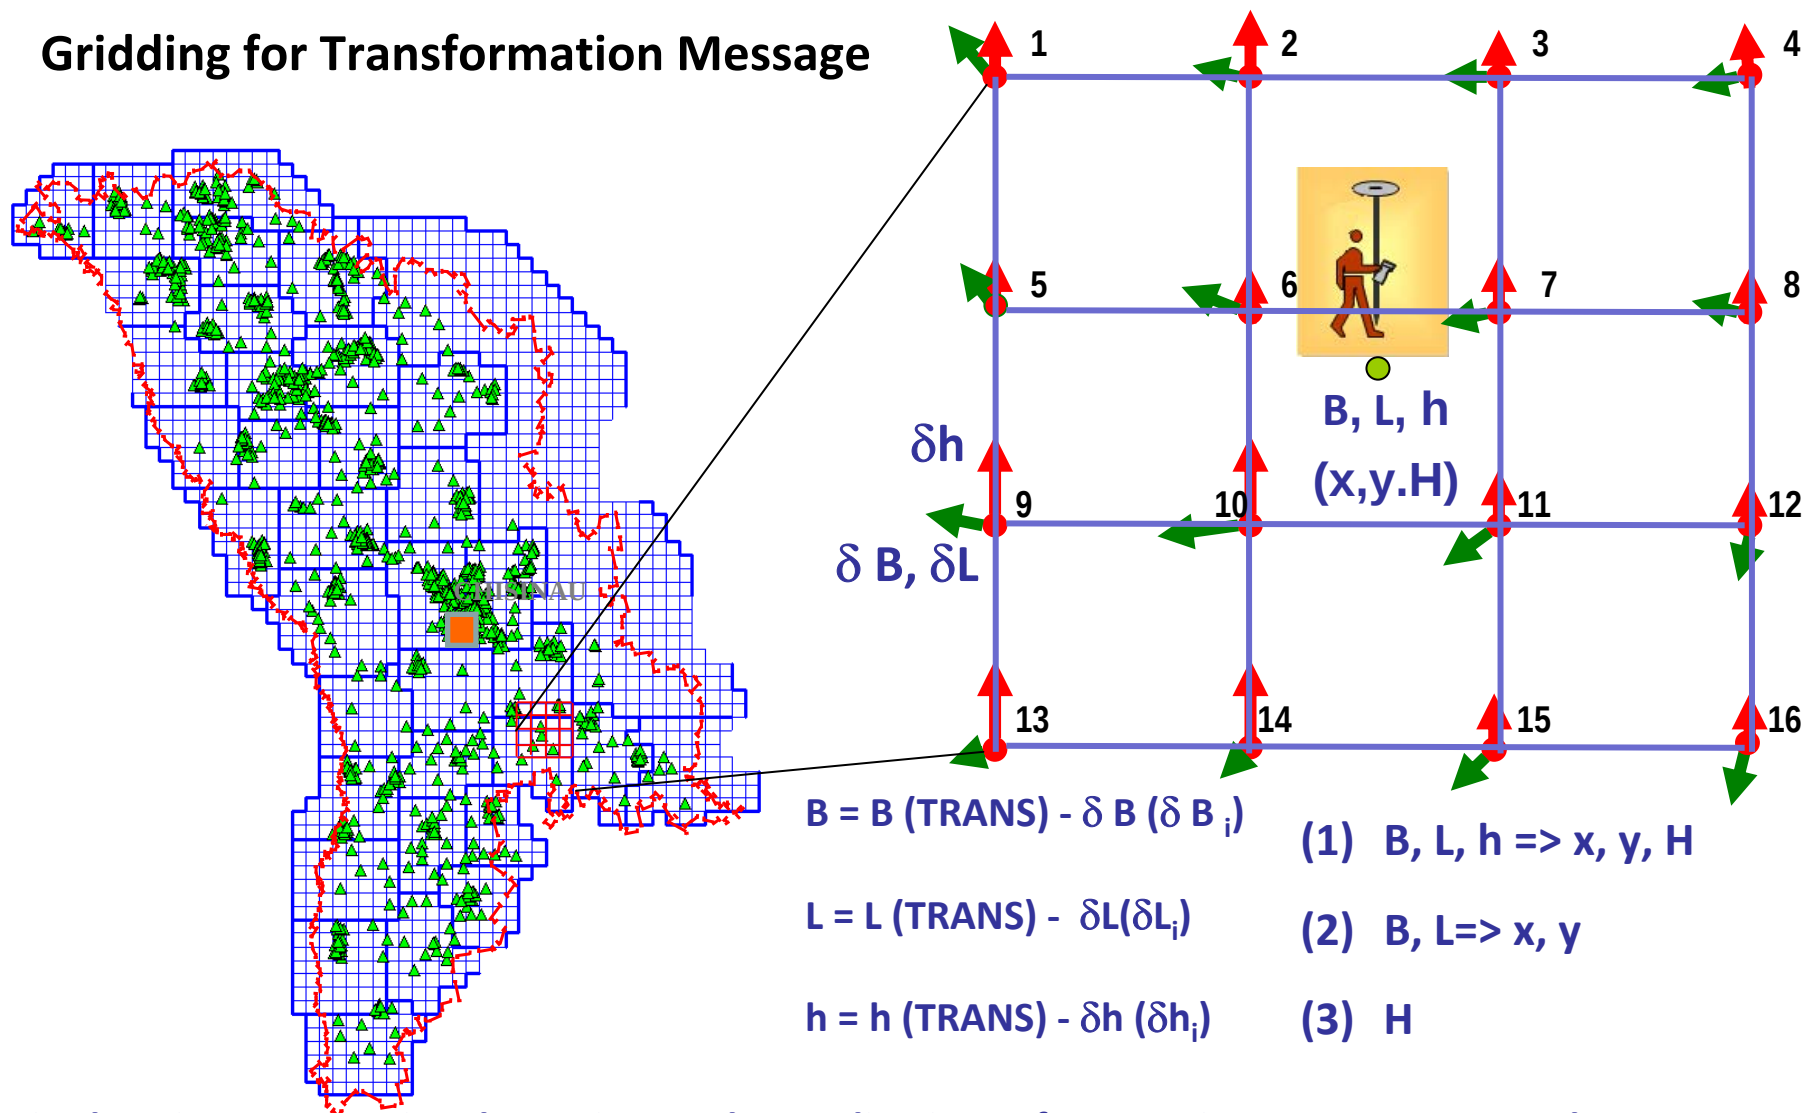



Generation of RTCM Transformation messages



Structure of RTCM messages 1021 /1022

Data FIELD	DF NUMBER	Values	Remarks
Message Number	DF002	1021	ETRS89, Europa DHDN, GK-3
Source-Name Counter	DF+1	4	
Source-Name	DF+2	4258	
Target-Name Counter	DF+3	7	
Target-Name	DF+4	31467	
System identification number	DF+5	1	
Involved Transformation message	DF+6	0000000110	
Plate number	DF+7	7	
Computation Indicator	DF+8	1	
Height Indicator	DF+9	2	
ϕ_V	DF+10	49.0102	
λ_V	DF+11	8.3921	
$\Delta\phi_V$	DF+12	0.04	
$\Delta\lambda_V$	DF+13	0.06	
dX	DF+14	-617.880	
dY	DF+15	-253.456	
dZ	DF+16	-315.690	
R ₁	DF+17	5.79748	
R ₂	DF+18	-2.44443	
R ₃	DF+19	-5.1534	
dS	DF+20	-13.51806	
add a _s	DF+24	8137.000	GRS80
add b _s	DF+25	6752.314	Bessel
add a _T	DF+26	7397.155	
add b _T	DF+27	6078.963	
Horizontal 7P Quality Indicator	DF+76	2	

Geoid-Grid or not

Grid
Location&Size

7 Parameters

Ellipsoid
Parameters
Source / Target



Generation of RTCM Transformation messages




Structure of RTCM message 1023 /1024

⋮				⋮	
δN_{14}	Residuals P_{14}	DF+71	0.001		
δE_{14}		DF+72	0.013		
δh_{14}		DF+73	0.049		
δN_{15}	Residuals P_{15}	DF+71	0.005		
δE_{15}		DF+72	0.009		
δh_{15}		DF+73	0.088		
δN_{16}	Residuals P_{16}	DF+71	0.006		
δE_{16}		DF+72	-0.002		
δh_{16}		DF+73	0.129		
Horizontal interpolation method indicator		DF+74	0		
Vertical interpolation method indicator		DF+75	0		
Horizontal Grid Quality Indicator		DF+78	1		
Vertical Grid Quality Indicator		DF+79	1		
Modified Julian Day (MJD) Number		DF+80	53570		

DFHRS Database use in direct access on controllers or for setting up the RTCM3.1 transformation-message, height indicator =2

$$H = h - \text{NFEM}(\mathbf{p} \mid \mathbf{B}, \mathbf{L})$$

GNSS-Positioning Services – User-Groups

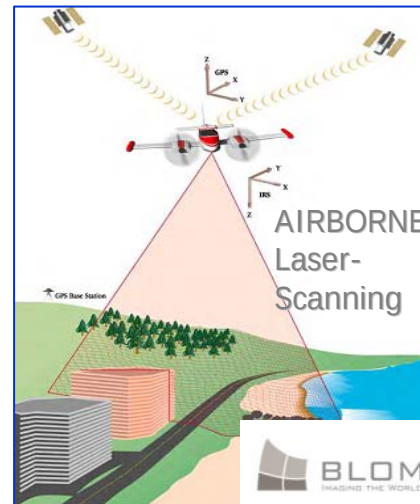

GNSS-based and Multisensor Low-Cost Platforms for Navigation and Object-Georeferencing



Growth of GNSS-Positioning Services User-Groups

Präzises Monitoring und Navigation bewegter Objekte

ASCOS Rechenzentrum

NTRIP Datentransfer über das Internet

EUREF oder IGS RTCM-Korrekturen

NTRIP-Format

Mobiles Internet (USB-Stick) und Internet GNSS-Radio

Axio Net

GNSS Internet Radio 1.4.11

Broadcaster Settings

START STOP Stream Details

Bytes: 0

Select Network: All Unprotected

Select Stream or Update: Update source table

Adjust Settings or press START.

John Deere

Hochschule Karlsruhe Technik und Wirtschaft

Ort	Basislänge [km]	Beobachtungsdauer [min]	EUREF IP Nord [m]	EUREF IP Ost [m]	John Deere MRTK Nord [m]	John Deere MRTK Ost [m]
Karlsruhe	ca. 20km	15 Minuten	0,0613	0,0604	0,0072	0,0066
Dresden	ca. 430km	15 Minuten	0,1657	0,2758	0,0088	0,0062
Viennamonde	ca. 610km	15 Minuten	0,1033	0,0742	0,0098	0,0064

BLOM
IMAGINE THE WORLD

Navigation and Location Based Services (NLS)

G800

50 3 0 1,5 36

Startlingsgata

NOKIA

BOSCH
Technik fürs Leben

BoniRob-Feldroboter schafft Basis für die Landtechnik der Zukunft

Schwärme kleiner Roboter, die selbstständig auf den Feldern herumstreifen, um gezielt Dünger auszubringen oder Unkraut zu bekämpfen – das könnte schon bald Wirklichkeit werden.



Hochschule Karlsruhe Technik und Wirtschaft

Hochschule Karlsruhe Technik und Wirtschaft (HKA) IAF
Institut für Angewandte Forschung (IAF)

GNSS/INS Drones

SEABEX ONE

Growth of GNSS-Positioning Services User-Groups

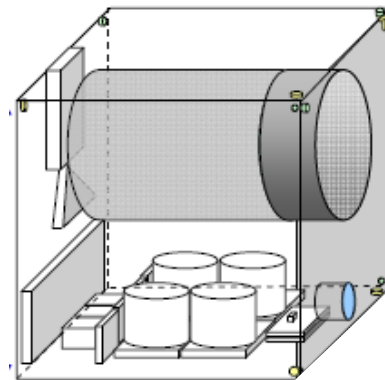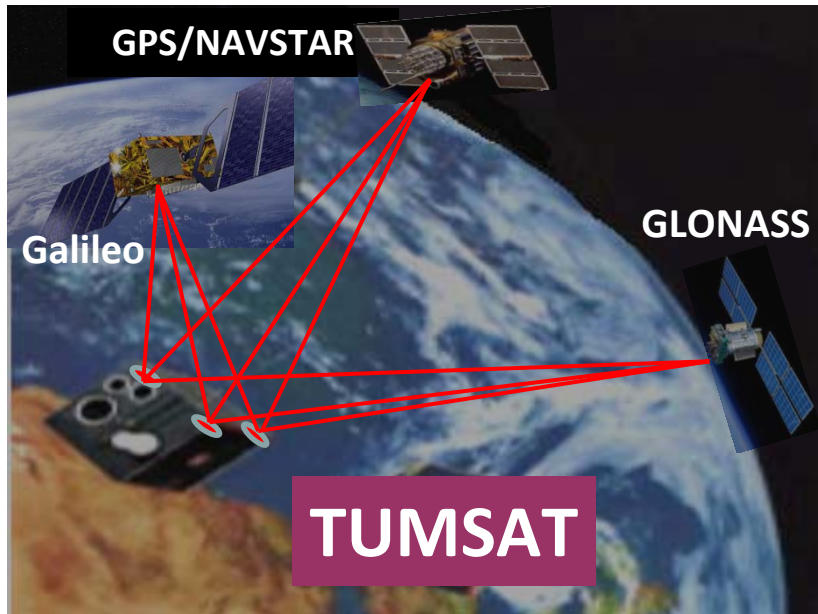

TUMSAT - Technical University of Moldova SATellite with remote sensing mission under construction in collaboration with:

- Siegen University, Institute for Data Communications Systems, Germany
- Karlsruhe University for Applied Sciences, Germany
- Institute of Cosmic Research, Moscow, Russia



Conclusions and Recommendations



- High precision Quasigeoid model will improve normal height determination from GNSS measurements using the MOLDPOS service
- Transformation Parameters data bases can be used by a large spectrum of users (geodetic works, cadastral surveying, GIS applications, mapping and boundary marking, etc.) and support of scientific applications (landslide and floods monitoring, environmental research, geohazard prediction, geodynamic investigations etc.)
- The new RTCM 3.1 transformation messages allows the GNSS service to provide their users with all necessary information for 2D positioning and GNSS-based height computation related to the national HRS
- For future improvement of Quasigeoid model accuracy a fitting GNSS/Leveling points related to 1st and 2nd order leveling networks to be measured. Gravity values of the national gravity network and vertical deflection measured by digital zenith camera along the state border to be included in the model



Technical University
of Moldova

University of
Applied Science



Thanks for attention

Contacts:

Vasile Chiriac,
Dr. As. Prof.
Technical University of Moldova
Bd. Stefan cel Mare 168,
Mob.Tel.: + 373(0) 69 29 50 57
Office 1 : + 373(22) 77 35 92
Office 1 : + 373(22) 26 10 45
E-mail: v_chiriac@hotmail.com

Reiner Jaeger,
Dr. ing. Prof.
Karlsruhe University of Applied
Science, Germany
Moltkestr. 30, D-76133 Karlsruhe
Mob.Tel.: ++ 49 (0) 152 533 103 28
Office : ++ 49 (0) 721 925 2620
E-mail: reiner.jaeger@web.de

For more detal information please visit web site www.moldpos.eu