



International Committee on
Global Navigation Satellite Systems

Interference Detection Concepts

Disclaimer

The views and opinions expressed herein do not necessarily reflect the official policy or position of any government agency

Interference Detection

- As the society is more dependent on GNSS as a source of PNT, the interference detection and possible mitigation is now more seriously being considered.
- In many parts of the world, experimental/trial projects of Interference Detection are now on-going



Interference Detection Concepts

- Geometry defines the coverage and drives the required technology
 - Local area (airport, seaport, bank, brokerage)
 - Transportation route (road, railway, coastline, canal)
 - Large area (town, city, country)
- Enforcement authority also drives decisions
 - Federal, state, local government or private entity
- No one approach is best for all requirements
 - Requirements include deployment cost, operational cost, privacy rights, etc.
- Benefits may not justify the cost
 - Could severe legal penalties suppress incidents?



Four Basic Types of Detection (1 of 2)

- Direction of signal arrival (D/F)
 - Two or more detection sites with narrow-beam antennas measuring angle of arrival
 - Intersection of two or more angles indicates position
 - Coordination needed between sites to verify target
- Time difference of signal arrival (hyperbolic)
 - With three or more detection sites with very precise time synchronization it might be possible to measure time difference of arrival of a jamming signal
 - This would define two hyperbolic lines intersecting at the jammer source
- Terrain and building clutter and multipath limit both types




Four Basic Types of Detection (2 of 2)

- Linear – detectors along a roadway
- Impact zone (crowd sourcing)
 - A high density of sensors with the ability to detect and report jamming intensity can localize a jammer by evaluating many nearby sensor reports
 - The ideal way to do this is to embed detectors in cell phone chipsets, cause wireless providers to collect the data and report to a “detection center”, allowing the detection center to forward the information to a local law enforcement agency
 - A close parallel is the way e911 operates in the U.S.
 - Crowd sourcing could be implemented with many of the same system elements




Angle of Arrival

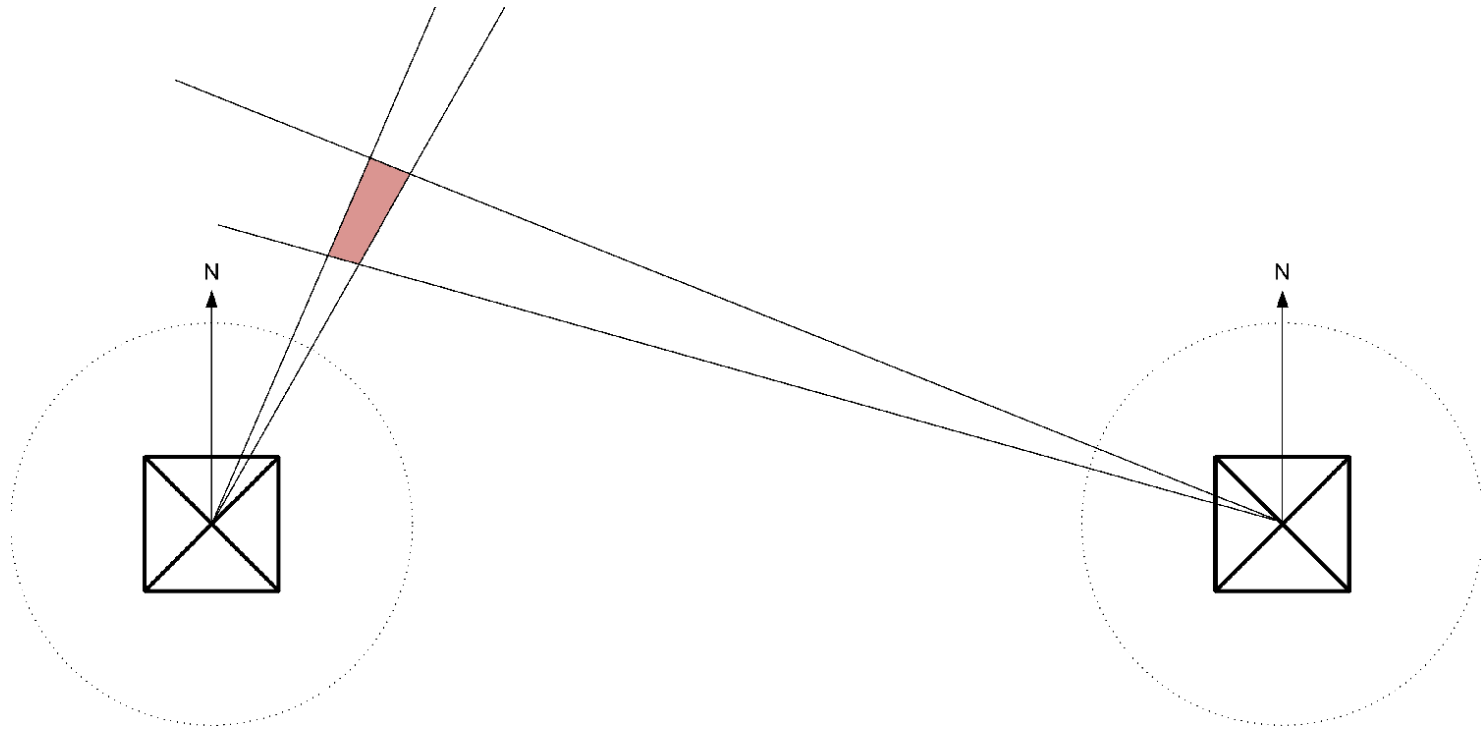

- A jammer can be located by measuring the angle of arrival at two or more known locations
- Accuracy depends on distance, beam width, and multipath



Time Difference of Arrival

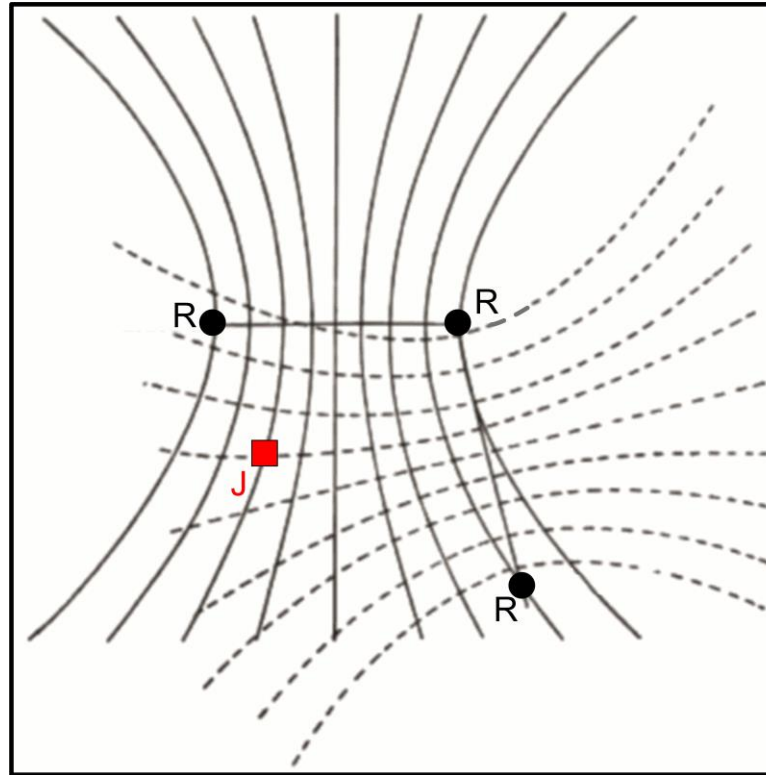

- Three or more receivers with nanosecond-level time coordination can determine the location of a jammer by measuring time difference of arrival of the jammer signal



Crowd Sourcing

- For monitoring wider coverage, crowd sourcing concepts for interference detection using cell phones/ smartphones are now being realized.



Every cell phone can be a GPS jamming detector.
Requires a Public/Private Partnership.

Thank You

Questions?